



राप्ती सोनारी गाउँपालिका
RAPTI SONARI RURAL MUNICIPALITY
गाउँ कार्यपालिकाको कार्यालय

OFFICE OF THE RURAL MUNICIPAL EXECUTIVE

अगैया, बाँके
लुम्बिनी प्रदेश, नेपाल

AGAIYA, BANKE
LUMBINI PROVINCE, NEPAL

पत्र संख्या/Ref. No.: ०८१/०८२

च.नं./Letter No.: २८११

मिति :- २०८२/०२/१३

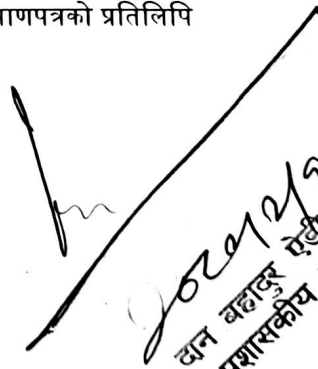
बिषय: दरभाउपत्र पेश गर्ने सम्बन्धमा

श्री गाउँपालिकामा सुचिदर्ता भएका/नभएका सबै फर्महरू

उपर्युक्त सम्बन्धमा यस राप्ती सोनारी गाउँपालिका वडा नम्बर ६ मा बुढीयानालामा पुल निर्माणको लागि आ.व. २०८१/०८२ को वार्षिक स्विकृत कार्यक्रम अन्तर्गत रु ६०००००.००/- (अक्षरूपी छ लाख मात्र) विनियोजित भइ लागत अनुमान अनुसारको संलग्न BOQ भरि तपशिल बमोजिमका कागजात सहित ७ दिन भित्र यस कार्यालयमा पेश गर्न हुन जानकारीका लागि सबैमा यो सुचना प्रकाशित गरिएको छ।

तपशिल :

१. दररेट पेश गरेको निवेदन
२. आ.व. २०८१/०८२ को लागि फर्म र इजाजत पत्र नविकरण भएको प्रमाणपत्रको प्रतिलिपि
३. मु.अ. कम्मा दर्ता भएको प्रमाणपत्रको प्रतिलिपि
४. आ.व. २०८०/०८१ को करचुक्ता प्रमाणपत्रको प्रतिलिपि।


बान बहादुर रेग्मी
प्रमुख प्रशासकीय अधिकृत

Rapti Sonari Rural Municipality
Office of the Rural Executive

Agaiya, Banke
5 No. Province Nepal

Bill Of Quantity(BOQ)

Name Of Project :- Budiya Khali Culvert Nirman Tatha P

Location :- Rapti Sonari-06 Bomlahav

F/Y:- 81/82

S.No.	Discription of works	Units	Quantity	Rate Rs.		Amount	Remarks
				In Igures	In Words		
1	Protect informatory boarding board	nos	1.00				
2	Earthwork in Excavation in soft soil in foundation for structures including removal of unsatisfactory materials up to 50m including handling, stacking and lift upto 1.5meter	cum	37.60				
3	Dry stone soring with granular material including all labour, materials, watering, ramming to full compaction and other incidentals required to complete the work as per the Specifications	cum	12.96				
4	Plain cement concrete work of grade M15 including material and labour required for mixing, placing in position, vibrating, compacting, finishing, curing and all other incidentals required to produce concrete of specified strength for abutment, wing walls etc	cum	13.47				
5	Coursed random rubble masonry work in 1:4 cement sand mortar including full compensation for all labour, materials and other incidentals required to complete the work	cum	30.58				
6	Supply and laying HDPE 75mm dia 2.5kg/cm ² for sub-surface water drainage	rm	10.00				
7	Local wood formwork including full compensation for materials, labour and other incidentals required for erection in level and position and removal form its position	sqm	17.24				
8	Supply and Delivery of Precast RC NP-3 class rumpipe (NS 80 205g) 900mm	nos	2.00				
	Sub Total						
	Vat @ 13%						
	Total Amount						